



PRODUCT INTRODUCTION

About us

Longde Limited focuses on the commerce of materials(metal, construction, heat preservation) and equipment (mechanical, tools), with products exported to more than 30 countries used in a wide range of applications (civil and industrial) with a consistent reputation of superior quality and diligent services. The Company is a supplier for worldwide customers in China and has a worldwide partner network and product information system operated by specialized crews that provide comprehensive services. LongDe's principles are innovation, quality, honesty, and cooperation. The Company aims to provide the customer with superior product and meticulous service.

Stone coated metal roof tiles advantage

Light roofing material

To compare with the traditional ceramic tile, the weight of Longde metal roof tile is just 1/6 of it. It is convenient to carry, store and use, so it can save the time and cost of installation.

Simple execution

Metal roof tile is very light and it is easy to incise and cut off, so it is suitable for all kinds of buildings, especially for the heavy grade roofs and towers.

Beautiful appearance

Extensive flexibility of colors and profiles provide various building design the perfect match.

Durable

Because of the AL-zinc and stone –chip coating, metal tiles have good anti-corrosion .They have credible and documented durability. The life span of tiles can be extended more than 30 years.

Features of stone coated roof tile

Good fire resistance

Metal roof tile is one kind of roofing material which is get the SLGD and natural stone in one ,it has the strong fire resistance .So it can reduce the lose of the fire.

Rain resistance

You don't worry about the leakage of rain from roof it use metal tile, which is suitable to use in the rain lasting area.

Hailstone resistance

Metal tile is well –liked because it can protect the building in the hail or storm.

Earthquake resistance

The light metal roof tile can lighten the building, so it has the excellently resistant ability.

Noisy Resistance

The surface of metal tile can absorb noise and avoid effectively the noise come from the storm.

Wind Resistance

Even metal tile just has the 1/6 of weight to the traditional tile, the scientific interlocking system design techniques guarantee the roofing system more safety in the storms.



Stone coated metal roof tile

LD- 01. Classical tiles A



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1340mm Overall width: 420mm

Cover length: 1270mm Cover width: 370mm

Thickness: 0.4mm

Weight: 2.7kg/pc

Tiles/SQM: 2.1PC

LD- 02. Classical Tile B



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1720mm Overall width: 420mm

Cover length: 1630mm Cover width: 370mm

Thickness: 0.4mm

Weight: 3.5kg/pc

Tiles/SQM: 1.65PC

LD- 03. Classical tiles C



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1170mm Overall width: 420mm

Cover length: 1120mm Cover width: 370mm

Thickness: 0.4mm

Weight: 2.3kg/pc

Tiles/SQM: 2.4PC

LD- 04. Classical tiles D



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1340mm Overall width: 420mm

Cover length: 1270mm Cover width: 370mm

Thickness: 0.4mm

Weight: 2.7kg/pc

Tiles/SQM: 2.1PC



LD- 05. Classical tiles E



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1340mm Overall width: 420mm

Cover length: 1270mm Cover width: 370mm

Thickness: 0.4mm Weight: 2.7kg/pc

Tiles/SQM: 2.1PC

LD- 06. Classical tiles F



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1340mm Overall width: 420mm

Cover length: 1270mm Cover width: 370mm

Thickness: 0.4mm Weight: 2.7kg/pc

Tiles/SQM: 2.1PC

LD- 07. Classical tiles G



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1170mm Overall width: 420mm

Cover length: 1120mm Cover width: 370mm

Thickness: 0.4mm Weight: 2.3kg/pc

Tiles/SQM: 2.4PC

LD- 08. Classical tiles H



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1340mm Overall width: 420mm

Cover length: 1270mm Cover width: 370mm

Thickness: 0.4mm Weight: 2.7kg/pc

Tiles/SQM: 2.1PC

LD- 09. Roman tiles A



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1300mm Overall width: 420mm

Cover length: 1250mm Cover width: 370mm

Thickness: 0.4mm Weight: 3kg/pc

Tiles/SQM: 2.1PC



LD- 10. Roman tiles B



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1340mm Overall width: 420mm

Cover length: 1270mm Cover width: 370mm

Thickness: 0.4mm

Weight: 2.7kg/pc

Tiles/SQM: 2.1PC

LD- 11. Flat tiles



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1320mm Overall width: 420mm

Cover length: 1270mm Cover width: 370mm

Thickness: 0.4mm

Weight: 2.7kg/pc

Tiles/SQM: 2.1PC

LD- 12. Wood tiles A



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1320mm Overall width: 420mm

Cover length: 1270mm Cover width: 370mm

Thickness: 0.4mm

Weight: 2.7kg/pc

Tiles/SQM: 2.1PC

LD- 13. Wood tiles B



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1320mm Overall width: 420mm

Cover length: 1270mm Cover width: 370mm

Thickness: 0.4mm

Weight: 2.7kg/pc

Tiles/SQM: 2.1PC

LD- 14. Nosen tiles



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1340mm Overall width: 420mm

Cover length: 1270mm Cover width: 370mm

Thickness: 0.4mm

Weight: 2.7kg/pc

Tiles/SQM: 2.1PC



LD- 15. Wave tiles



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1300mm Overall width: 460mm

Cover length: 1270mm Cover width: 370mm

Thickness: 0.4mm

Weight: 2.7kg/pc

Tiles/SQM: 2.1PC

LD- 16. New classical tiles



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 820mm Overall width: 770mm

Cover length: 870mm Cover width: 800mm

Thickness: 0.4mm

Weight: 3.1kg/pc

Tiles/SQM: 1.67PC

LD- 17. Circular Hip A



Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 420mm

Cover length: 380mm

Thickness: 0.4mm

LD-18 . Circular Hip B




Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)

Overall length: 1200mm

Cover length: 1180mm

Thickness: 0.4mm

LD-19. Side Flshing

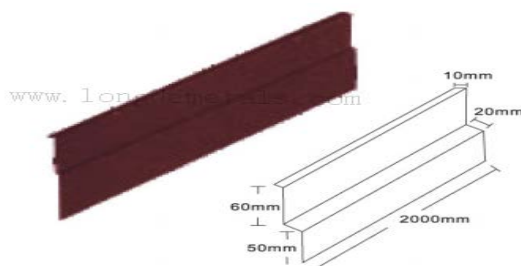

Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)


Overall length: 2000mm

Cover length: 1900mm

Thickness: 0.4mm




LD-20. Ridge Hip

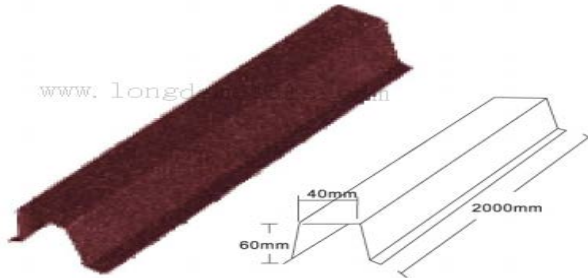


Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)
Overall length: 2000mm
Cover length: 1900mm
Thickness: 0.4mm

LD-21. Angle Hip

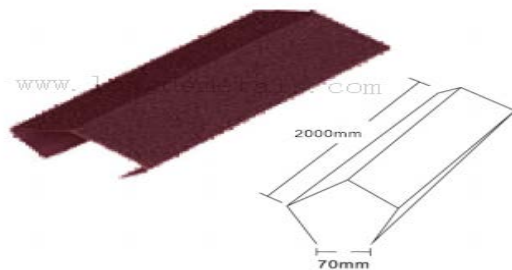


Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)
Overall length: 2000mm
Cover length: 1900mm
Thickness: 0.4mm

LD-22. Flat Sheet

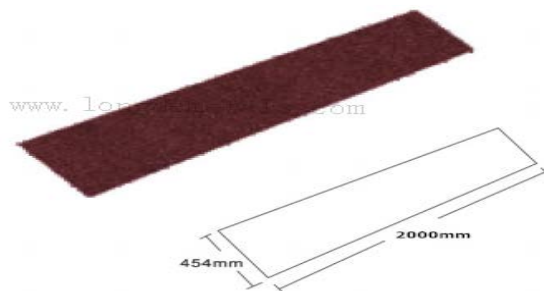

Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)
Overall length: 2000mm
Cover length: 1900mm
Thickness: 0.4mm


LD-23. Box Barge Cover

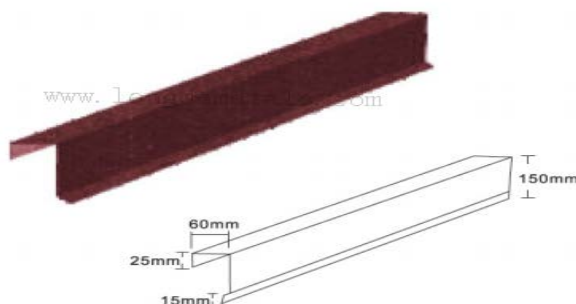

Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)
Overall length: 2000mm
Cover length: 1900mm
Thickness: 0.4mm




LD-24. Valley Tray

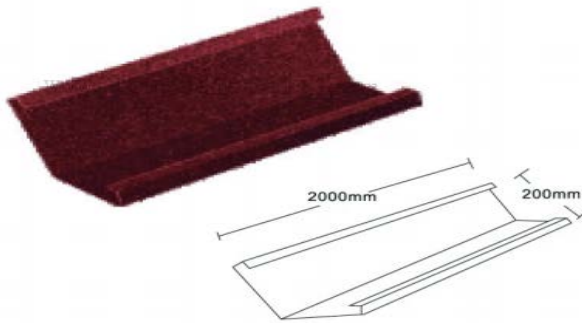


Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)
Overall length: 2000mm
Cover length: 1900mm
Thickness: 0.4mm

LD-25. Eaves Flashing

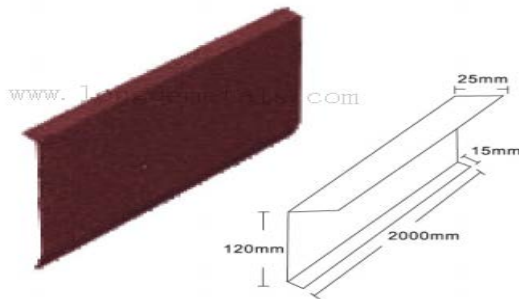

Material: Galvalume coated steel panel (Green back fingerprint resist of back coating)
Overall length: 2000mm
Cover length: 1900mm
Thickness: 0.4mm

Roof install

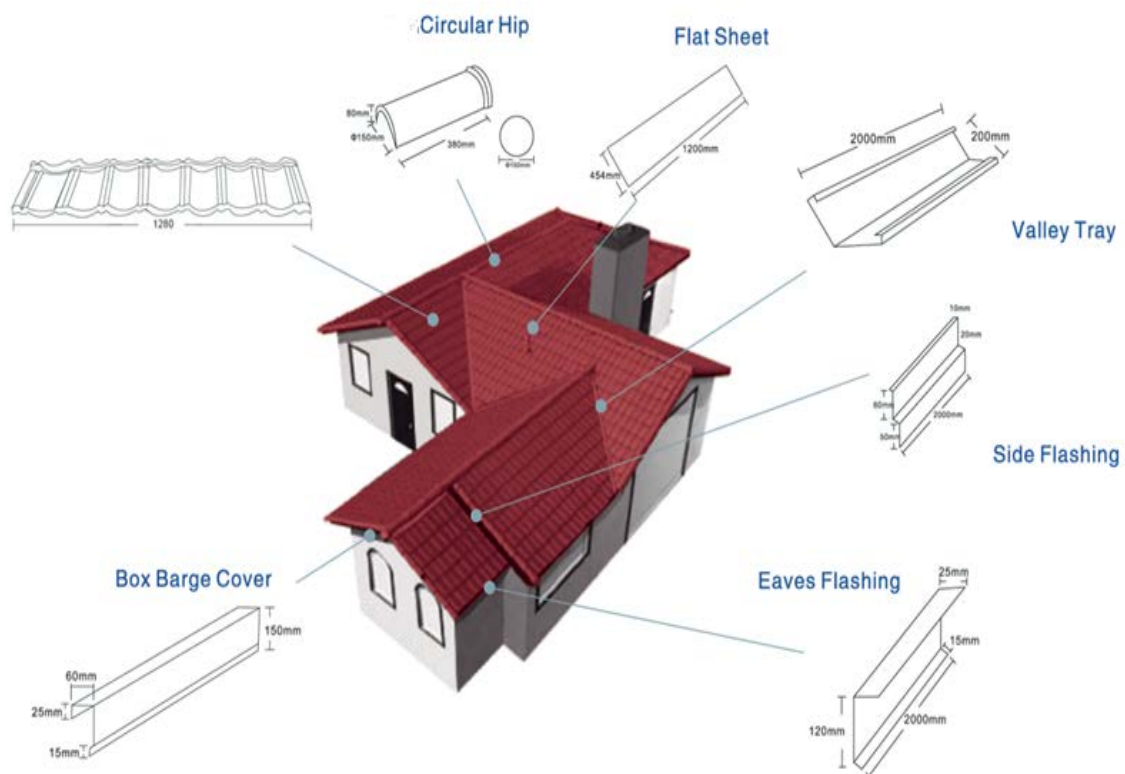



DEZHOU LONGDE METALS CO. LTD

ADD.: Economic Development Zone Dezhou City, Shandong, P. R. China.

Tel: +86-534-2696101 Fax: +86-534-2696102 Http://www.longdemetals.com

Contact

Company: Dezhou Longde Metals Co. Ltd.

Address: Economic Development Zone Dezhou City, Shandong, P. R. China.

Tel: +86-534-2696101 +86-15806885191

Fax: +86-534-2696102

Web: www.longdemetals.com

Email: tony@longdemetals.com info@longdemetals.com